

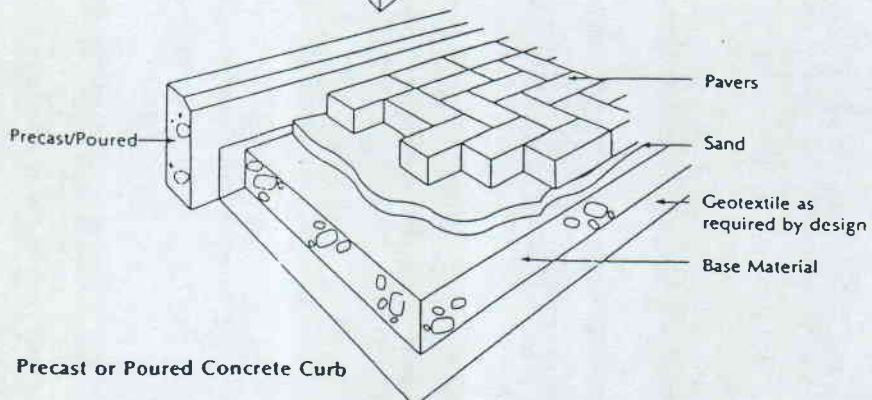
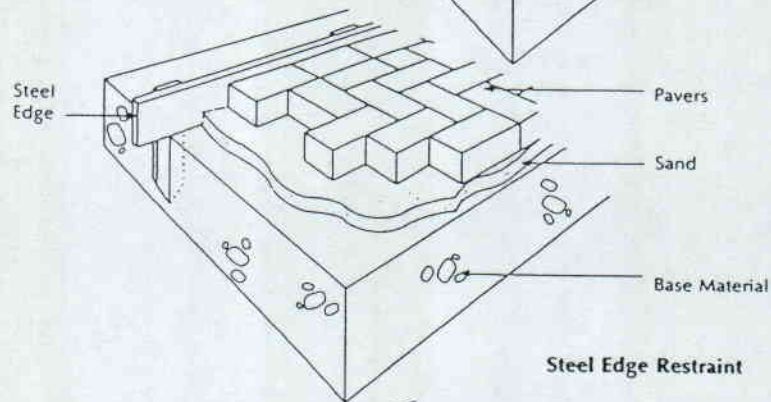
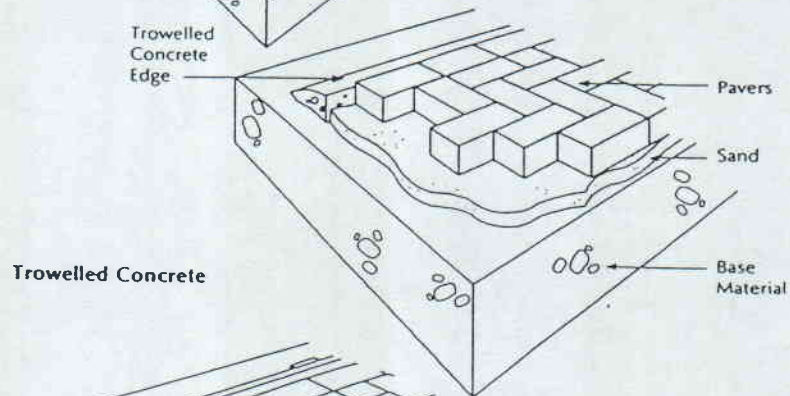
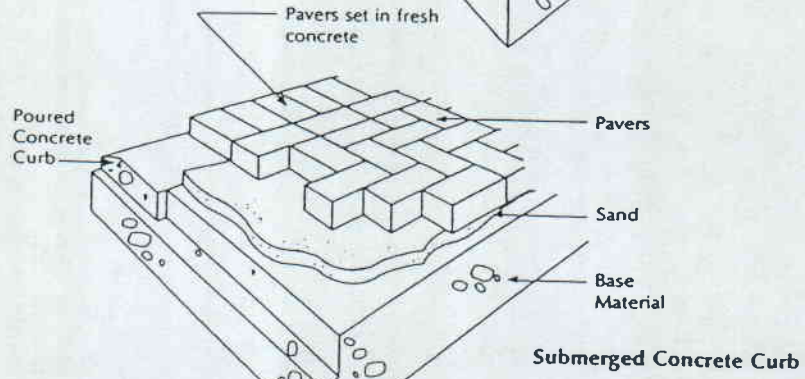


# TYPICAL EDGE RESTRAINTS

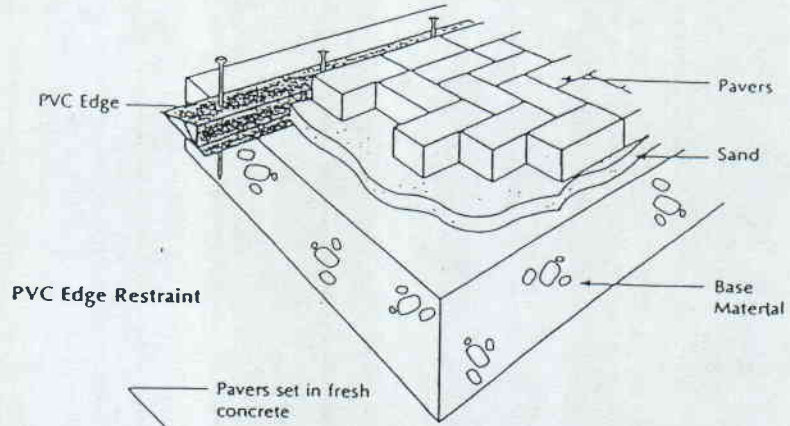

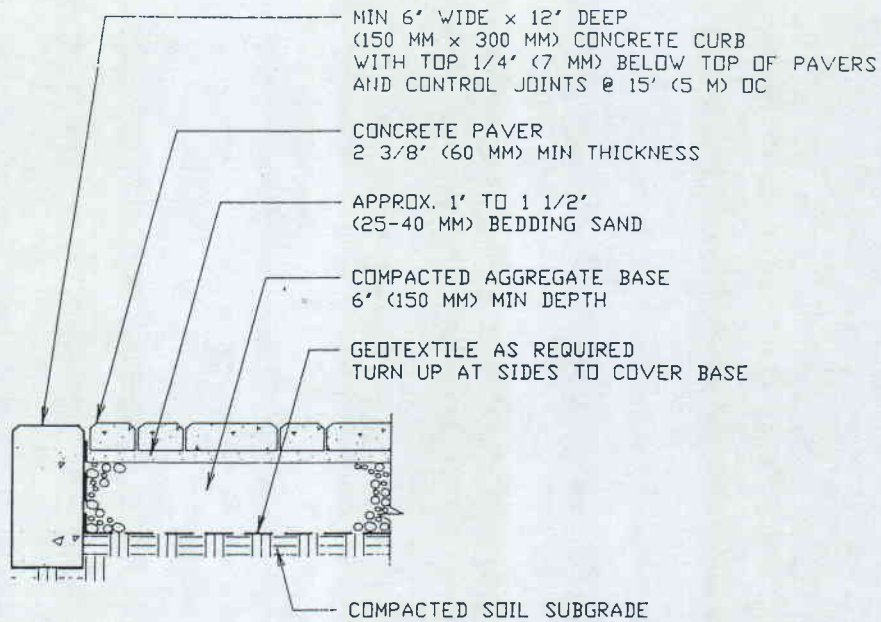


NOTE:

1. THICKNESS OF GRAVEL BASE WILL VARY WITH TYPE OF SOIL SUBGRADE AND CLIMATE.
2. CONCRETE PAVERS SHOULD BE PLACED ON A CEMENT TREATED BASE IF SOIL IS EXTREMELY WEAK OR CONSTANTLY SATURATED. PAVERS CAN BE OVERLAID OR INLAID ON EXISTING ASPHALT OR CONCRETE DRIVEWAYS.



RESIDENTIAL DRIVEWAY  
CONCRETE EDGES

DRAWING NO.	CPI-11
SCALE	1"=1'-0"

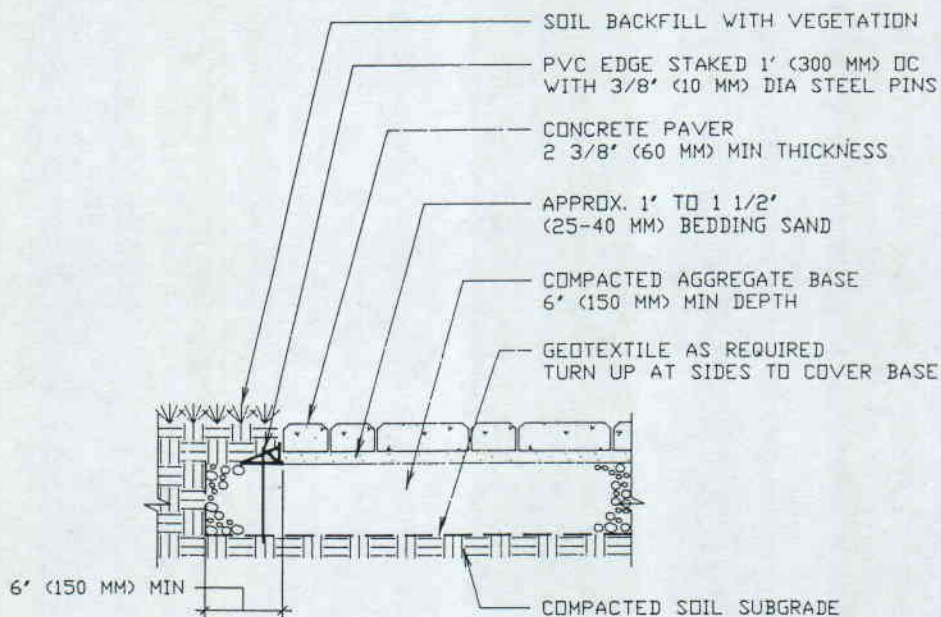

NOTE: THICKNESS OF GRAVEL BASE WILL VARY WITH TYPE OF SOIL SUBGRADE AND CLIMATE.



RESIDENTIAL DRIVEWAY  
PVC EDGE

DRAWING NO.	CPI-13
SCALE	1"=1'-0"